

Floestone Model 400 Barrier-Free Terrazzo-Shower Receptor



Some Models Conform to
ADA REQUIREMENTS*

Architect's Specifications


Furnish and install wheelchair accessible Terrazzo Shower Receptor Model 400 as manufactured by Floestone Products Company. Flanges on three sides, cast integral, shall be of galvanized - bonderized steel and shall extend not less than 1" above the shoulders. Shoulders on three sides shall be not less than 2½" inside. Threshold shall be not more than ½" above receptor floor to allow for barrier free entrance. Drain body shall be brass, cast integral, and shall provide for a non-caulked connection not less than one inch deep to a 2" pipe. Removable type stainless steel strainer plate shall be supplied. Receptor shall be manufactured of tan and white marble chips cast in white Portland cement to produce a compressive strength of not less than 3,000 PSI, seven days after casting. Terrazzo surface shall be ground, polished, and the entire unit sealed to resist stains and moisture. Receptors reinforced with 16-gauge wire.

Options

Offset drain.


Additional flanges.

(Drawings required)

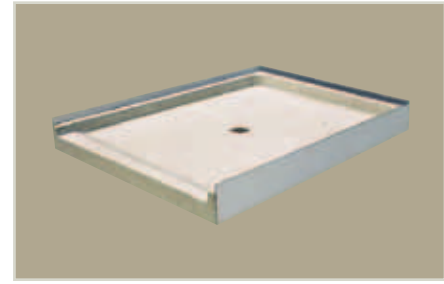

Model 400

Barrier free, center drain Terrazzo Shower Receptors with reduced threshold height.

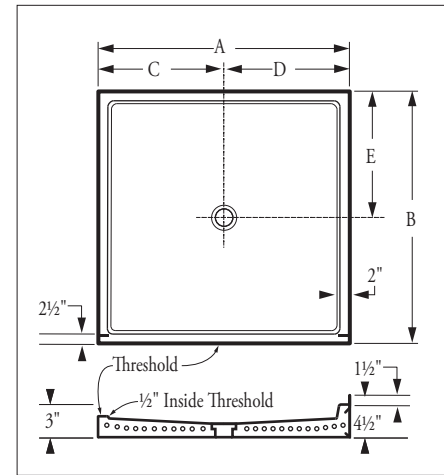

A*	B	C	D	E	WT.
36"	36"	18"	18"	18"	315
✓ 40"	38"	20"	20"	19"	370
42"	42"	21"	21"	21"	381
42"	36"	21"	21"	18"	365
48"	36"	24"	24"	18"	445
48"	48"	24"	24"	24"	550
60"	32"	30"	30"	16"	435
60"	36"	30"	30"	18"	500
✓ 63"	33"	31½"	31½"	16½"	500

* Width of threshold (other sizes available upon request)

✓ Conforms to ADA Requirements



FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • floestone.com

Dimensions subject to change without notice.
Contact Floestone Products to verify product specifications.

For barrier-free installation, contractor shall provide 1½" minimum recess for curb in sub floor.