





Shown: Model 5



Island

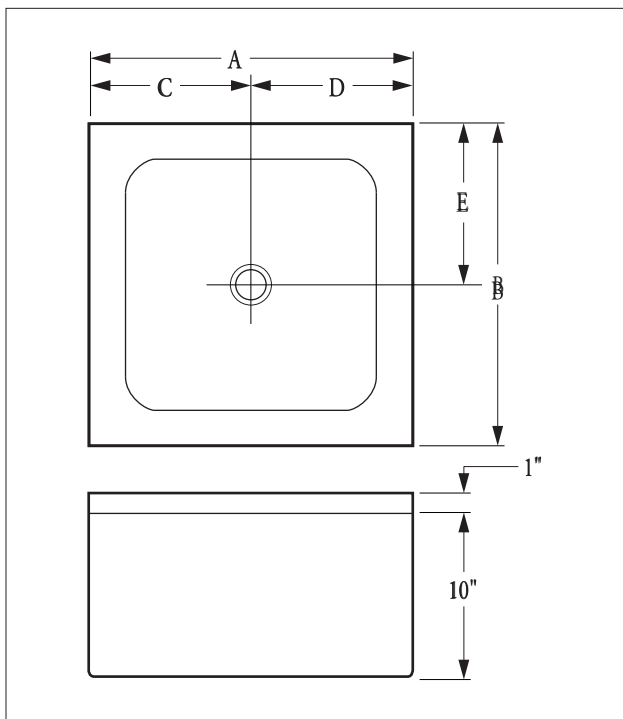

| A | B | HT. | C | D | E | WT. |
|-----|-----|-----|-----|-----|----|-----|
| 24" | 24" | 10" | 12" | 12" | 12 | 221 |

**Dimensions may vary ± 1/4" inch.
Please check unit before installation.**

Florestone Model 5 Terrazzo Mop Receptor

Architect's Specifications

Furnish and install mop receptor as manufactured by Florestone Products Co. Shoulder shall be not less than 8" high inside and not less than 11" wide.

Drain body shall be brass, cast integral and shall provide for a non-caulked connection (lead caulked optional) not less than one inch deep to a two or three inch pipe (specify 2" or 3"). Mop sinks with 3" drains are supplied with a Wedge-Lok® seal for use on ABS pipe only. Receptor shall be manufactured of tan and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 PSI, seven days after casting. Terrazzo surface shall be ground and polished with all air holes and/or pits to be grouted and excess removed and sealed to resist stains and moisture. Receptor will be reinforced with 16 gauge wire. Stainless steel grid standard.

Note: Terrazzo is not designed to be used with anything that is over 130 degrees Fahrenheit.

Note: Specify 2" or 3" drain size (3" standard).



FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com