



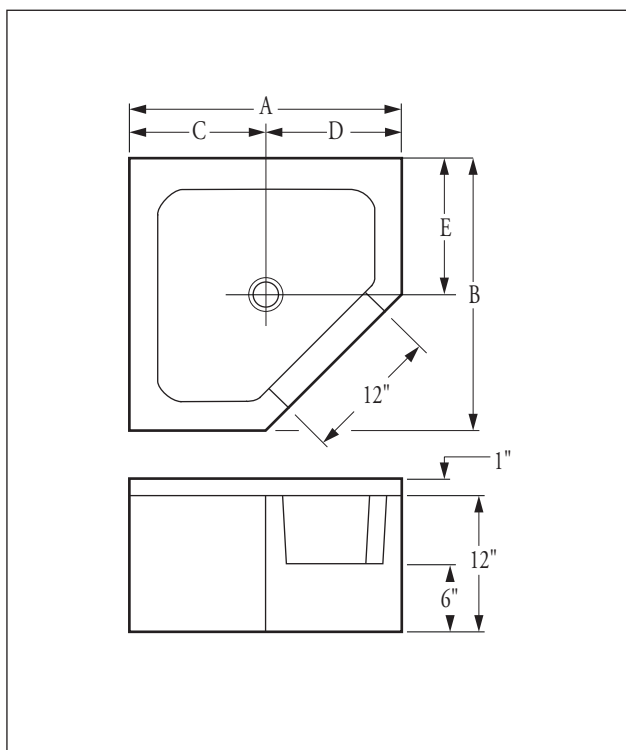

Shown: Model 95

Flanges:  Stainless Steel Caps: 



Dimensions may vary \pm 1/4". Please check unit before installation.

Model	A	B	C	D	E	WT.
95	24"	24"	12"	12"	12"	310
95	32"	32"	16"	16"	16"	385
95	36"	36"	18"	18"	18"	465
96	24"	24"	12"	12"	12"	310
96	32"	32"	16"	16"	16"	385
96	36"	36"	18"	18"	18"	465

Florestone Models 95 / 96 NEO ANGLE Drop Front Terrazzo Mop Receptors

Architect's Specifications

Furnish and install neo angle drop front mop receptor as manufactured by Florestone Products Co. Shoulder shall be not less than 4" high inside and not less than 1 1/4" wide. Galvanized, bonderized steel flange will be cast integral and extend at least one inch above shoulder on two sides for corner installation against stud wall. Stainless steel protective cap to be cast integral on drop front (Model 96 only). Drain body shall be brass, cast integral and shall provide for a non-caulked connection (lead caulked optional) not less than one inch deep to a two or three inch pipe (specify 2" or 3"). Mop sinks with 3" drains are supplied with a Wedge-Lok® seal for use on ABS pipe only. Receptor shall be manufactured of tan and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 PSI, seven days after casting. Terrazzo surface shall be ground and polished with all air holes and/or pits to be grouted and excess removed and sealed to resist stains and moisture. Receptor will be reinforced with 16 gauge wire.

Note:

Specify 2" or 3" drain size (3" standard).
Specify Model Number and size.



FLORESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • florestone.com