


SUBMITTAL SHEET

36-60H Accessible Shower

Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	 Standard Features One-piece unit 2" Threshold AcrylX™ applied acrylic Slip-resistant floor
Notes:	Interior Dimensions: 48" W x 35" D x 80" H Exterior Dimensions: 60" W x 36" D x 81 ½" H Skirt Height: 2" Weight: 260 lbs Wall Finish: Smooth Drain Location: Center Material: AcrylX TM
CONFIGURATION (handed by seat) Fully Configured Includes: One stainless steel soap dish; Symmons® presshand held shower head with hose and stainless steel slid stainless steel wrap bar.	sure balance mixing valve with concealed check stops; Moen® e bar/grab bar; a collapsible water dam; 2" drain; tension rod; on
CUSTOM OPTIONS (Not Available if Fully Configured Option	on is selected)
Seat: Left-Handed Phenolic Seat Right-Handed Straight Grab Bars (All Grab Bars are Stainless Steel ur	nded Phenolic Seat
12"(left side wall) – QTY: 12"(right side wall) Location: Location: 22" – QTY: 24" – QTY: 26" – QT) – QTY: 16" – QTY: 18" – QTY: Location:
Location: Location: Location: Location: Location: Location: Location: Location: Pixture Wall: Left Right Back Hand-held shower assembly with 30" slide bar and 6 Pressure balancing mixing valve	Location:
OPTIONAL ACCESSORIES	
Shower Curtain Curtain Rod 2" Drain C	Collapsible Water Dam

SUBMITTAL SHEET

ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

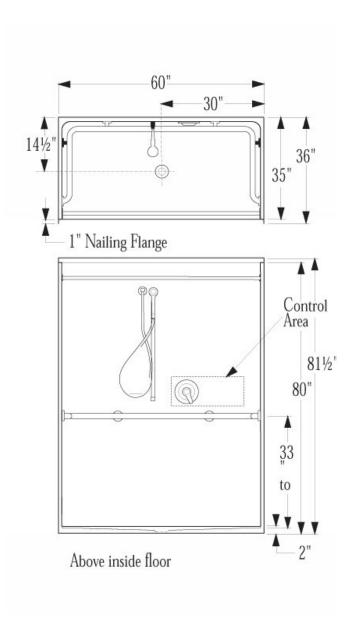

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date: