

SUBMITTAL SHEET


3PC 30-60H Accessible Shower

Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	Standard Features • Three-piece unit • 2" Threshold • AcrylX™ applied acrylic • Slip-resistant floor
Notes:	• Silp-resistant nooi
	Interior Dimensions: 58" W x 30" D x 80" H Exterior Dimensions: 60" W x 31" D x 81 ½" H Skirt Height: 2" Weight: 245 lbs Wall Finish: Smooth Drain Location: Center Material: AcrylX TM
CONFIGURATION	
Fully Configured	
Includes: One stainless steel soap dish; Symmons® pressure bal hand held shower head with hose and stainless steel slide bar/grone stainless steel wrap bar	ance mixing valve with concealed check stops; Moen® ab bar; a collapsible water dam; 2" drain; tension rod;
CUSTOM OPTIONS (Not Available if Fully Configured Option is sele	ected)
Seat: Left-Handed Phenolic Seat Right-Handed Ph	nenolic Seat
Straight Grab Bars (All Grab Bars are Stainless Steel unless ot	herwise noted):
12"(left side wall) – QTY: 12"(right side wall) – QTY:	16" – QTY: 18" – QTY:
Location: Location:	
22" – QTY: 24" – QTY: 26" – QTY:	
Location: Location: Fixture Wall: Left Right Back Hand-held shower assembly with 30" slide bar and 60" hose Pressure balancing mixing valve	
ORTIONAL ACCESSORIES	
OPTIONAL ACCESSORIES	





ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

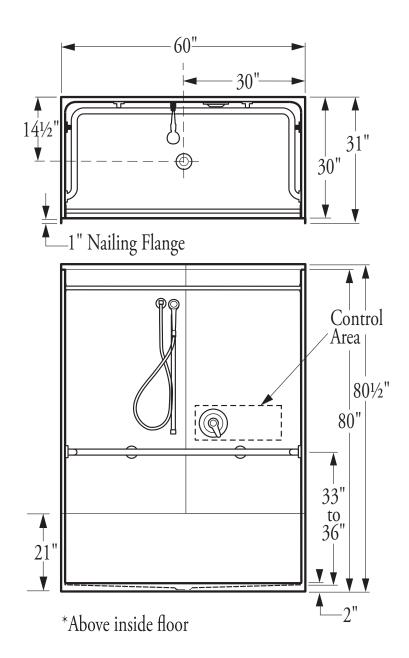

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date: