

FLORESTONE

A spec above.



MOLDED LRTM SHOWER PANS

Featuring THE EDGE



MOLDED LRTM SHOWER PANS

Featuring THE EDGE

Architect's Specifications

Furnish and install molded fiberglass one piece shower unit manufactured by Florestone Products Company. Unit to be manufactured of AcrylX™ applied acrylic and to be supplied with slip-resistant floor laminated for extra rigidity. Color will be white (unless otherwise specified). Unit to be supplied with a 2" PNC non-caulk drain.

Colors



Standard Color: White

Accessories

Strainer: Chrome

Strainer: Plastic

Repair Kit

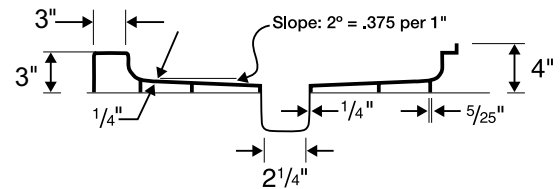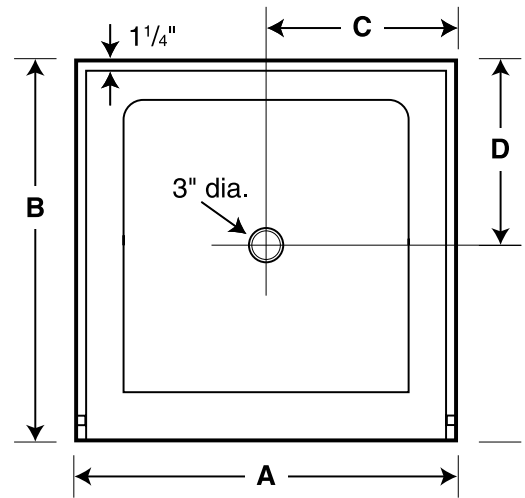

Model	A	B	C	D
3060F	60"	30"	30"	30"
3448F	48"	34"	24"	24"
3460F	60"	34"	30"	30"
3636F	36"	35 3/4"	18"	18"
3642F	42"	36"	21"	21"
3648F	47 3/4"	35 1/2"	24"	24"
3660F	60 3/8"	30 3/16"	30 3/16"	17 6/16"
3848F	48 1/4"	38"	24 1/8"	24 1/8"
4242F	42"	42"	21"	21"
4248F	47 3/4"	41 3/4"	24"	24"
4842F	42 1/4"	48"	21 1/8"	21 1/8"
4848F	47 3/4"	48"	24"	24"

Standards: I.A.P. M.O. International Association of Plumbing and Mechanical Officials File No. 0687. ANSI American National Standards Institute - Specifications Z-124.2.

Dimensions may vary $\pm 1/4"$. Please check unit before installation. Place receptor on a bed of mortar or plaster for warranty compliance. Dimensions subject to change without notice. Contact Florestone Products to verify product specifications.